




Column Speaker

TS-803C

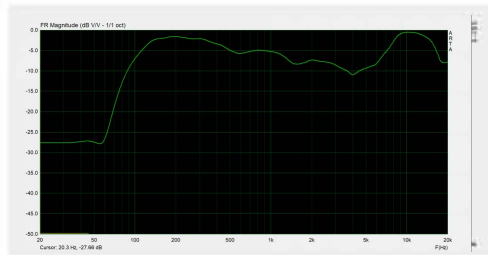

Description

It is suitable for large multifunctional halls, theaters, gymnasiums, outdoor performances, etc.

Feature

- * Adopt 3" x8 full range speaker units;
- * Housing: 12mm high-quality high-density board, precision CNC processing, wear-resistant paint treatment.
- * Accurately designed speaker frequency response to optimize high fidelity reproduction of the human voice part;
- * Splicing speaker design to achieve a wider range of sound field coverage with fewer speakers.

Specification

Model	TS-803C
Rated power	300W
Peak power	1200W
Max SPL (rated/peak)	120dB/126dB
Nominal impedance	4Ω
Frequency Range	70Hz-20kHz
Sensitivity	95dB(1M/1W)
Speaker unit	3" x8
Net weight	10.6kg
Dimension (mm) (H×W×D)	970×150×200