




# Column Speaker

## TS-603C

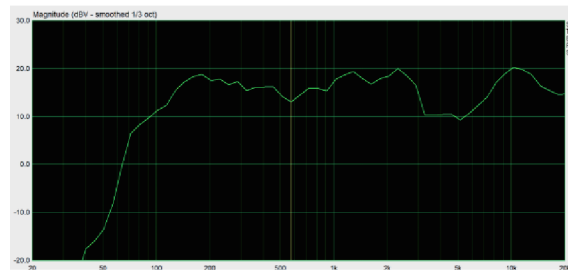

### Description

It is suitable for large multifunctional halls, theaters, gymnasiums, outdoor performances, etc.

### Feature

- \* Adopt 3 " ×6 full range speaker units;
- \* Housing: 12mm high-quality high-density board, precision CNC processing, wear-resistant paint treatment.
- \* Accurately designed speaker frequency response to optimize high fidelity reproduction of the human voice part;
- \* Splicing speaker design to achieve a wider range of sound field coverage with fewer speakers.

### Specification

Model	TS-603C
Rated power	200W
Peak power	800W
Max SPL (rated/peak)	118dB/124dB
Nominal impedance	6Ω
Frequency Range	80Hz-20kHz
Sensitivity	95dB(1M/1W)
Speaker unit	3 " ×6
Net weight	9.8kg
Dimension (mm) (H×W×D)	760×150×195