

T-602X Wall Mount Speaker

Features

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 2x4" full range speaker unit
- Power taps 10W-20W @100V
- Wooden enclosure and fabric mask in black
- Easy and fast hook wall mount installation

Description

The T-602X is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 4" full range speaker driver is designed of wide frequency response 100-20KHz, the multiple power taps 10W, 20W are helpful for different applications varies from room size and ambient noise surroundings.



The wooden enclosure and fabric mask are of black color. Easy and secure wall mount installation through the supplied mounting hook.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.


Specification

Model	T-602X
Rated power(100V)	10W/20W
Maximum power	40W
Sensitivity	91dB
Impedance	Com/1KΩ/500Ω
Frequency response	100-20KHz
Speaker unit	4" x 2
Size	440 x 151 x 151/111mm
Weight	3.3Kg


Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn




Appearance:



Direction Diagram:

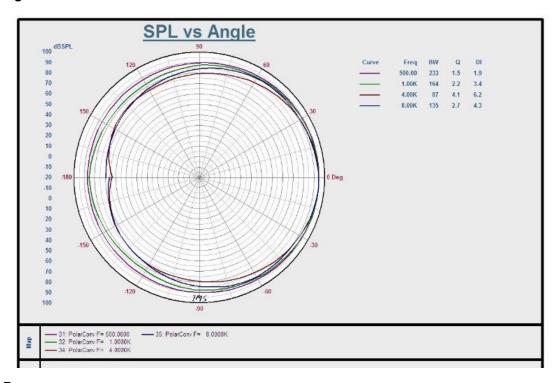

Frequency Response:

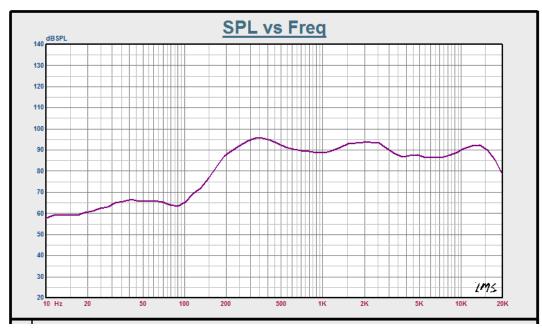

Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn