



## T-108L

### Ceiling Speaker (Coaxial Speaker) (1.87W 3.75W 7.5W 15W)

#### Features

- Built-in 100v/70v transformer
- In-ceiling type loudspeaker
- 8" speaker unit
- Power taps 1.85W, 3.75W, 7.5W & 15W @100V
- Metal grille and metal baffle
- Paint in white color
- Spring clip clamp installation type
- Metal back cover could be added

#### Description

The T-108L is a ceiling speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.



The built-in 8" speaker driver is designed of wide frequency response 90-20KHz, the multiple power taps 1.85W, 3.75W, 7.5W & 15W are helpful for different applications varies from room size and ambient noise surroundings. The metal grille and metal baffle are painted in attractive white color. Its spring clip clamp makes the easy and secure installation.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.

#### Specification



Model	T-108L
Power Taps @100V	1.87W, 3.75W, 7.5W, 15W
Power Taps @70V	0.93W, 1.87W, 3.75W, 7.5W
Impedance	Black: Com Blue:5.3KΩ Red:2.7KΩ Green:1.3KΩ White:0.67KΩ
SPL(1W/1M)	90dB
Max. SPL (Rated W/1M)	102dB
Frequency Response (-10dB)	90-20KHz
Finish	Baffle: Steel, White Grille: Steel, White
Speaker Driver	8" x 1 1" x 1
Cutout Size	230mm
Dimensions	265 x 75mm
Weight	1.2Kg
Mounting	Spring-clip




# T-108L

## Ceiling Speaker (Coaxial Speaker) (1.87W 3.75W 7.5W 15W)

Appearance:

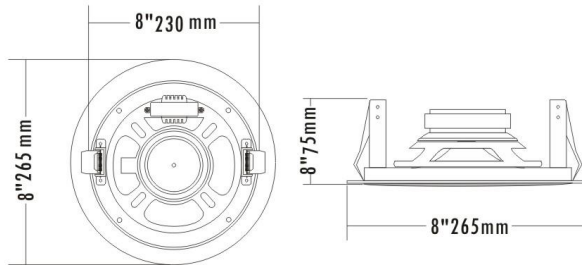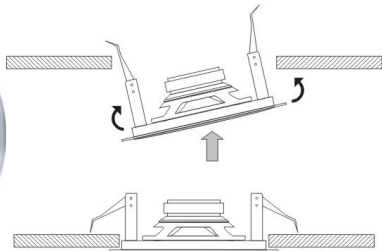

Direction Diagram:

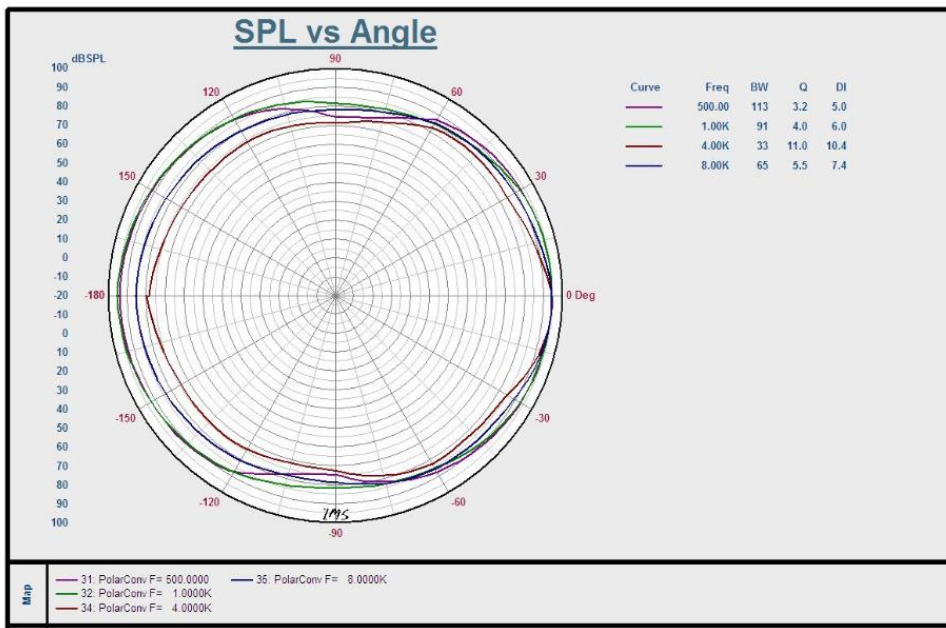

Frequency Response:

